


Dry Cut

Circular saw blade for cutting ferrous metals

Fast cut, perfect finish!

FREZITE developed the Dry Cut saw for dry cutting (without lubrication) ferrous metals. Ensures a thin, clean cut and high quality finish. Suitable for the cut of several types of materials. The ideal solution for particularly demanding cutting jobs in metalworking industries and construction. Fast cut, prevent overheating the material and the red color, typical of abrasive disk cuts.

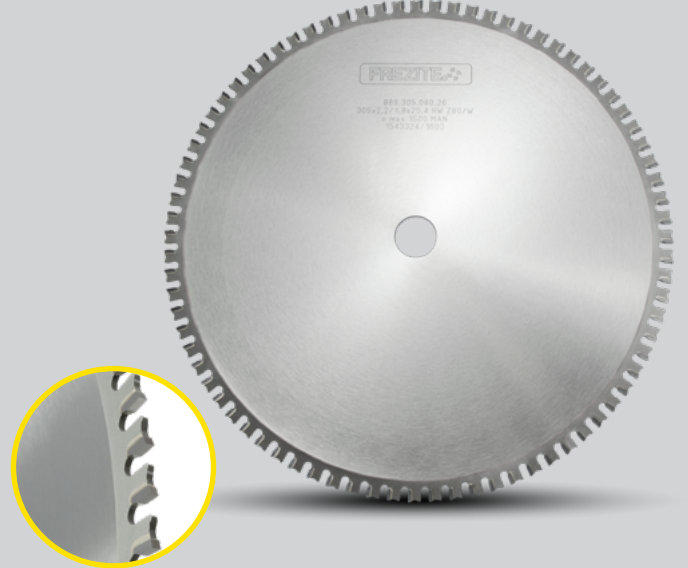

APPLICATION

- For cutting of steel rods and profiles, PVC profiles with metal reinforcement, compound materials, sheets, etc. without coolants.

MACHINES

- Mitre cutting machines.
- Portable machines, etc.

TECHNICAL INFORMATION

- Alternate top bevel with chamfer grinded carbide teeth (HW). Special design carbide grade tips for these applications.
- Saw blade with diameter = 305; Z80, special recommended for stainless steel.

ADVANTAGES

- High performance.
- Thin and clean cut without burrs.
- Prevent overheating the material.
- Teeth with high resistance to breakage.
- Excellent ratio quality / price.

HW

WE



D	B	b	d	Z	NL/TK	n _{max}	Ref.
160	2,2	1,8	20	30		2800	889.160.030.20
190	2,2	1,8	30	38		2400	889.190.038.30
216	2,2	1,8	30	48	NL30	2200	889.216.048.30
230	2,2	1,8	30	44	NL30	2000	889.230.044.30
250	2,2	1,8	30	48	NL30	1800	889.250.048.30
	2,2	1,8	30	60	NL30	1800	889.250.060.30
254	2,2	1,8	15,87	60		1800	889.254.060.15
	2,2	1,8	30	60	NL30	1800	889.254.060.30
270	2,2	1,8	30	60	NL30	1700	889.270.060.30
305	2,2	1,8	25,4	60		1500	889.305.060.26
	2,2	1,8	25,4	80		1500	889.305.080.26
	2,2	1,8	30	60	NL30	1500	889.305.060.30
	2,2	1,8	30	80	NL30	1500	889.305.080.30
355	2,2	1,8	25,4	90		1500	889.355.090.26
	2,2	1,8	30	90	NL30	1500	889.355.090.30
400	2,8	2,2	25,4	100		1200	889.400.100.26

