

## PRO-Rip

Circular saw blade for the first processing of wood

### Máxima estabilidade, alta resistência

This saw has been developed to ensure precise cuts in solid wood, soft or hard, with a moisture content of up to 15 per cent. It features a flat sharpening profile, combined with inner and outside wipers. The circular saw blade PRO-Rip guarantees a more stable cutting process and extends the tool's service life. With Frezite you'll find the right tool for longitudinal cutting, depending on the characteristics of the wood (dry, naturally moist, moist and green).




#### TECHNICAL INFORMATION

- Innovative heat and surface treatment.
- Optimised tip gorje for high cutting heights.
- Carbide teeth with greater impact resistance for more aggressive applications.

#### MACHINES

- For single and double spindle multisaw machines.

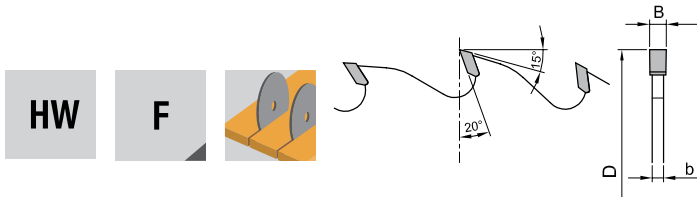

#### ADVANTAGES

- More stable body due to heat treatment.
- Less chip and resin adhesion to the body due to the differentiating surface treatment.
- Reduced power consumption due to the combination of Z + Rz and new slot geometry.
- More resistant to tear off and breaking in more severe applications.

#### APPLICATIONS

- Ideal for demanding operations requiring high performance and durability. For longitudinal cutting of solid, soft and hard wood with a maximum moisture content of 15%.

D	B	b	d	Z+RZ	NL/TK	T Min-max	FL Max	Ref.
250	3,2	2,2	70	20F+4	4/21x6	40-55	120	856.250.120.70
	3,2	2,2	80	20F+4	2/21x6 + 2/13x5	40-55	120	856.250.120.80
300	3,2	2,2	70	20F+4	4/21x6	45-70	120	856.300.120.70
	3,2	2,2	80	20F+4	2/21x6 + 2/13x5	45-70	120	856.300.120.80
	3,4	2,2	80	20F+4	Raimann	45-70	120	856.300.220.80
350	3,5	2,5	70	24F+4	4/21x6	50-100	120	856.350.124.70
	3,5	2,5	80	24F+4	2/21x6 + 2/13x5	50-100	120	856.350.124.80
	3,6	2,4	80	24F+4	Raimann	50-100	120	856.350.224.80

D - Cutter diameter  
B - Cutter width

b - Body thickness  
d - Bore

Z - Edges  
NL/TK - Pinhole / Diameter for pin holes

T - Grooving depth  
FL - Flange diameter

